


TOLDBOD 6.1 BOLLARD

TOL-155-B / G16.5/IF candelabra / 120V / Black texture / - / - / - / 5847901402

The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light.



Skagen

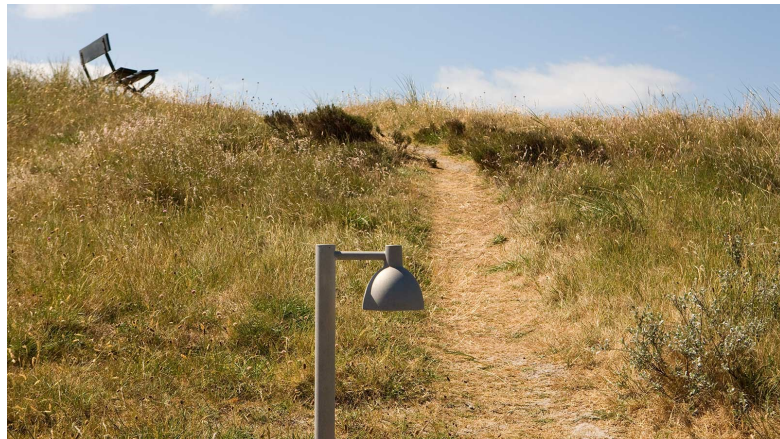

Henne Mølle Å Badehotel

Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Electrical: Maximum Lamp Wattage: 60W Delivered lumens: 661 lm Efficacy: 3.0 lm/W Certifications: cULus, Wet Location Protection class IP44 IK class 05 BUG Rating: B0-U1-G0 Controllability: Phase dimming.

Mounting

Base plate dimension: 6" diameter. Base plate: Mounted to a concrete base with 3 anchor bolts on a bolt circle of 3.54" diameter. Installation: Refer to mounting instruction download for installation details.

Finish

Black, powder coated.

Materials

Shield: Tempered sand blasted glass. Luminaire head: Die cast aluminum. Post: Extruded aluminum. Base plate: Aluminum.

Sizes and weight

Width x Height x Length (in.) | 6.1 x 35.4 x 10.5 Max 5.0 lbs

Compliance


cULus, Wet location.

Light source


G16.5/IF candelabra

Information

Electrical:
Maximum Lamp Wattage: 60W
Delivered lumens: 661 lm
Efficacy: 3.0 lm/W
Certifications:
cULus, Wet Location
Protection class IP44
IK class 05
BUG Rating: B0-U1-G0
Controllability: Phase dimming.

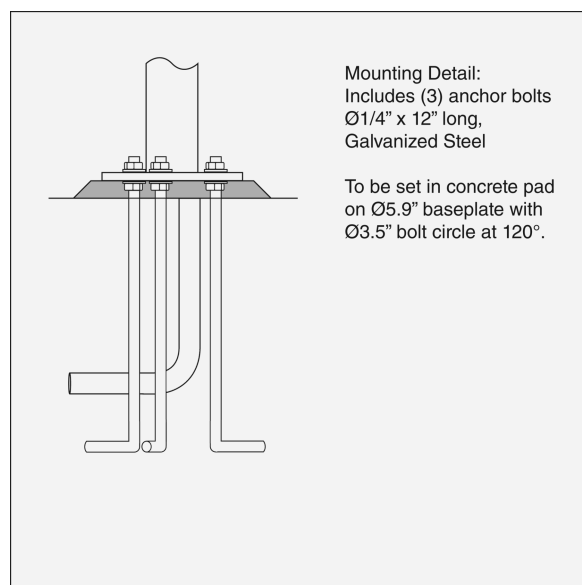


Related products



Toldbod Pendant



Toldbod 6.1/8.7 Glass
Pendant



Toldbod 6.1 Wall



Toldbod 11.4 Post

Toldbod 6.1 Bollard

CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
BUG Rating	B0 U1 G0
Driver life	-

SDCM	-
Watt	-
Light control	-
Surges	-
L80B50 (hours)	-